



Industry-leading AloT Smart Security Solutions



About Anviz

Secure Workplace, Simplify Management

As the industry leader in professional and converged intelligent security solutions, Anviz is dedicated to optimizing people, things, and space management, securing worldwide SMB and enterprise organizations' workplaces, and simplifying their management.

20+ Years

Experience

2000+

Authenticated solution providers and installers

300000+

Enterprise organizations

200+

Patents and Intellectual properties 300+
Distributors worldwide

200K+
Projects spread in
140 countries

You Can Trust Anviz

Trusted by **300+** global partners and **300,000+** enterprise organizations.

270+ patents. Core technology includes **BioNano®** core biometrics algorithm,

Real-time video stream analysis algorithm, ACP Protocol, etc.

400+ employees are dedicated to creating best-in-class solutions in U.S.A and Chinese **50,000+** sq ft factory.

Three Product Lines Covering Your Workplace

O1
Access Control

O2
Time Attendance


Smart Surveillance







Industry-leading AloT Smart Security Solution

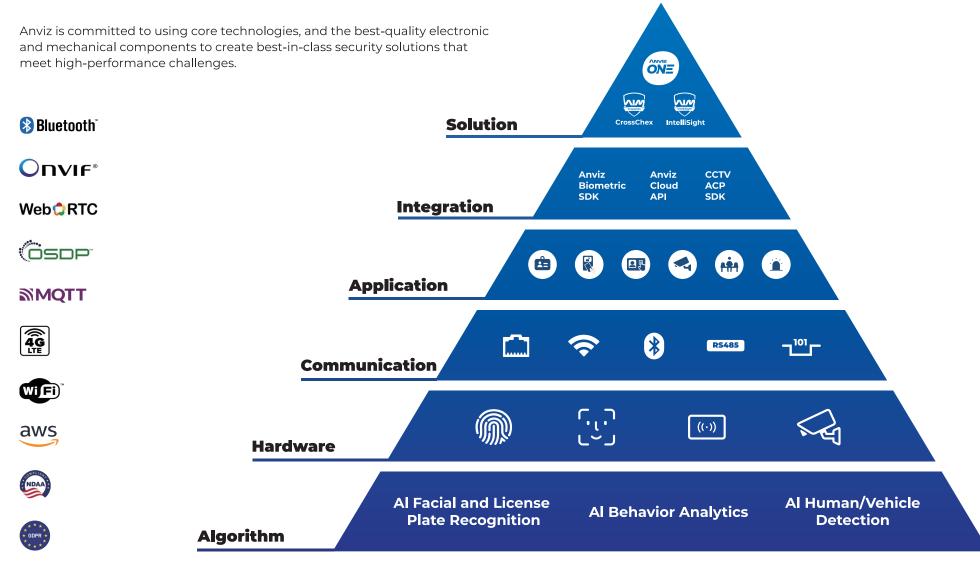



New Cloud-based Time & Attendance Management Solution Works for Any Business

CrossChex is a professional access control and time & attendance management solutions. With it's unique features and flexible and multiple system deployment structures, customer oriented concepts to satisfy SMB and enterprises clients for their time management, access control management requirements and help them improve the overall efficiency on HR and security management.



CrossChex Standard

A Comprehensive Software Designed for Time Attendance and Access Control Streamlined Management







Personnel Management




API




Device Management



Access Control Management

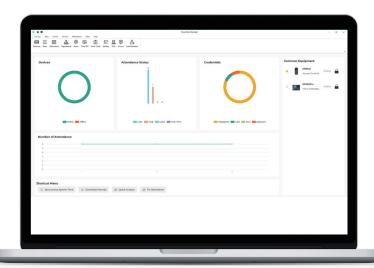

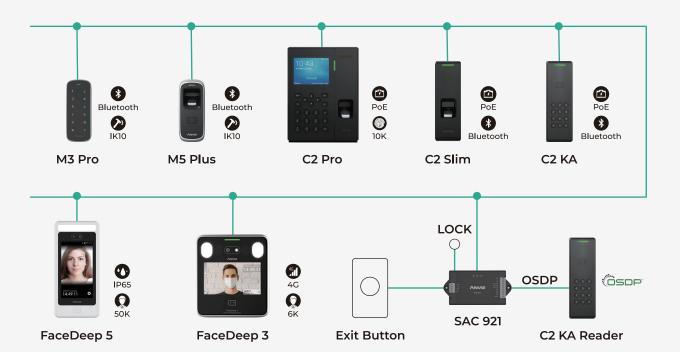

User Case



Aviation Service Company, Jordan




Large enterprise campus, Shanghai




Airport, Thailand



High school, Singapore

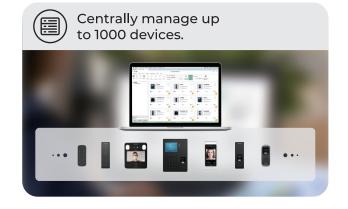




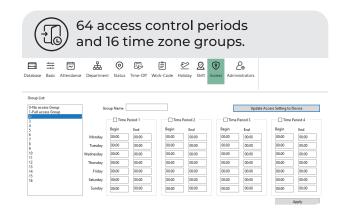




Features of CrossChex Standard



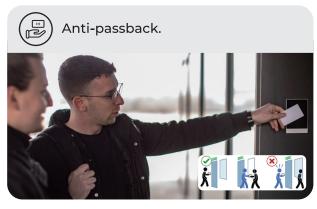

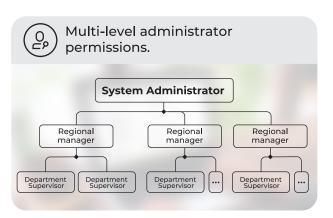

CrossChex Cloud

New Cloud-based Time & Attendance Management Solution Works for Any Business









Notification



Device Management



Mobile APP



User Case



Transportation, India



Subway, Beijing





McDonald restaurant, Uruguay




Healthcare Facilities, Mexico



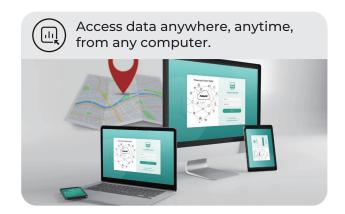

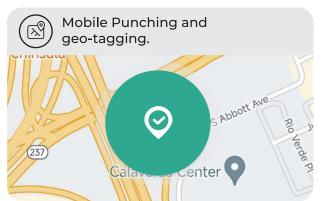


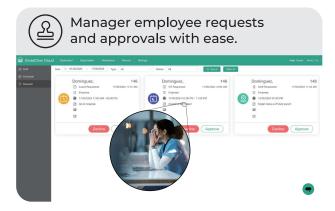




Features of CrossChex Cloud



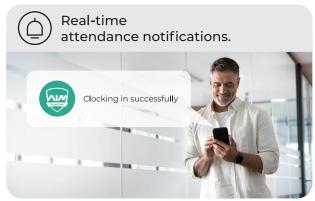

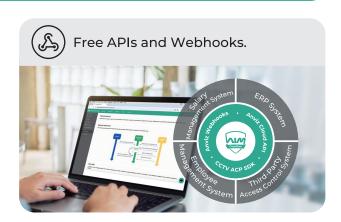



CrossChex Mobile

Touchless Standalone Access Control Solution with Mobile

CrossChex Mobile allows you to control who can gain access to specific locations and employees can clock in and enter with one tap on their phone. It can be seamlessly integrated with various Anviz access control and time attendance devices equipped with Bluetooth. It is ideal for small businesses, stores, gyms, and medical facilities.











For Admins


- Use your phone to add and delete users/ fingers/cards.
- Grant or revoke access to anyone with one click.
- Save cost of issuing cards and maintenance in comparison to physical cards.





For Users

- Use your phone to unlock doors.
- Employees can check in and out from the phone.
- No more lost, misplaced or shared cards.
- Check attendance record from your phone.

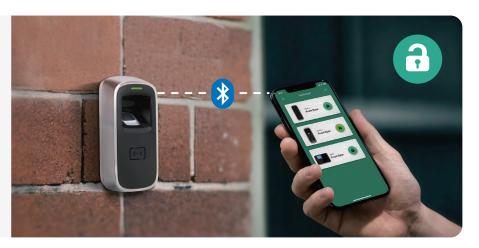



Smart Cloud-Based Face Recognition Time Attendance & Access Control Terminal



- Custom Permission Access
- Make Access Simple and Flexible
- Super Easy to Install Anywhere






STANDARDIZED NEW ARRIVAL COMMUNICATIONS SOLUTION

C2KA-OSDP Keypad Reader & SAC 921 Access Controller


Cheaper to install with less cables
 Much more secure with encryption

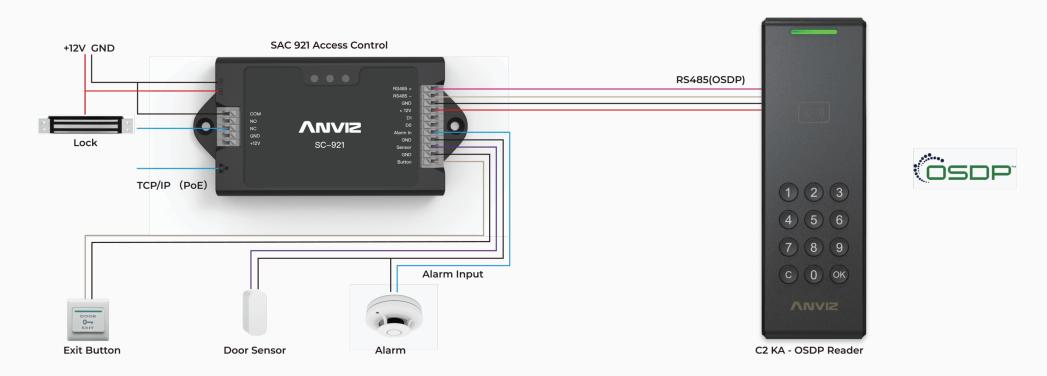

To facilitate system integration,

Anviz offers:

Anviz provides comprehensive support services for partners developing their software with the Anviz SDK. Customers can build their unique cloud system software based on the PHP development language. Cloud-to-cloud interfacing for easy integration with third-party systems. Active dynamic data and event push, reducing server workload effectively.

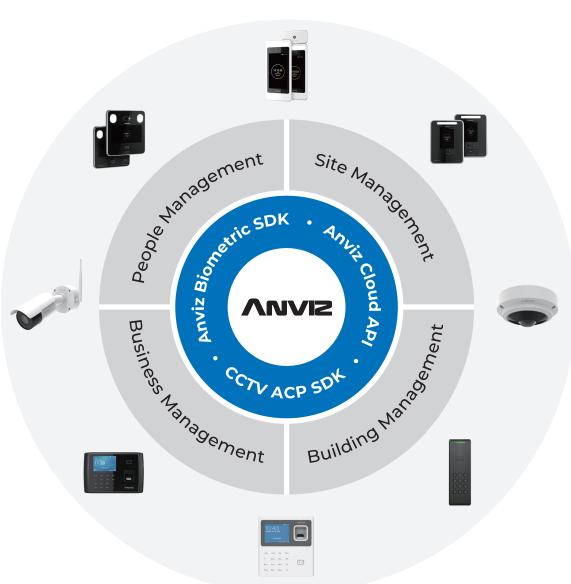

	picture		8			**	*	10.43
	Product Name	FaceDeep 5 Series	FaceDeep 3 Series	FacePass 7 Pro Series	W3	M3 Pro	M5 Plus	C2 Pro
	Identification Mode	Face, Card, Password	Face, Card, Password	Face, Card, Password	Face, Card, Password	Card, Password	Fingerprint, Card	Fingerprint, Card, Password
Credential	RFID	125kHz EM & 13.56MHz MIFARE	FaceDeep 3 : 125kHz EM FaceDeep 3 Pro : 13.56MHz MIFARE	125kHz EM	125kHz EM	125kHz EM & 13.56MHz MIFARE	M5 Plus: 125kHz M5Plus MIF: 13.56MHz	125kHz EM & 13.56MHz MIFARE
Canacity	Max.User	50,000	6,000	3,000	200	10,000	3,000	10,000
Capacity	Max.Logs	100,000	100,000	100,000	50,000	100,000	50,000	100,000
	CPU	1.0GHz Dual Core	1.0GHz Dual Core	1.0GHz Dual Core	1.0GHz CPU	1.0GHz CPU	1.0GHz CPU	1.0GHz Dual Core
	LCD	5.0" TFT Touchscreen	5.0" TFT Touchscreen	3.5" TFT Touchscreen	2.8" TFT	-	-	3.5" TFT
	Sound	Voice	Voice	Voice	Buzzer	Buzzer	Buzzer	Voice
	Multiple Language	Yes	Yes	Yes	Yes	-	-	Yes
	Working Temperature	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-30°C~60°C (-22°F~140°F)	-30°C~60°C (-22°F~140°F)	-10°C~60°C (14°F~140°F)
	Dimensions (W X H X D)	88X190X16 mm (3.465X7.48X0.629")	14.6X16.5X3.4 cm (5.75X6.50X1.34")	124X155X92 mm (4.88X6.10X3.62")	105X72X46mm (4.13X2.83X1.81")	47X124X22mm (1.85X4.88X0.87")	50X124X34.5mm (1.97X4.88X1.36")	140X190X32mm (5.51X7.48X1.26")
	Protection	IP65 (FaceDeep 5 only)	-	-	-	IP65 & IK10	IP65 & IK10	-

picture	3	*		10:43		10.43 - And			11 728
Product Name	C2 Slim	C2 KA	C2 SR	W1 Pro	W2 Pro	EP300 Pro	EP30	VF30 Pro	A350
Identification Mode	Fingerprint, Card	Card, Password	Card	Fingerprint, Card, Password	Fingerprint, Card, Password	Fingerprint, Card, Password	Fingerprint, Card, Password	Fingerprint, Card, Password	Fingerprint, Card, Password
RFID	125kHz EM & 13.56MHz MIFARE	125kHz EM & 13.56MHz MIFARE	125kHz EM & 13.56MHz MIFARE	125kHz EM	125kHz EM	125kHz EM	125kHz EM	VF30 Pro: 125kHz VF30 Pro MIF: 13.56MHZ	125kHz EM & 13.56MHz MIFARE
Max.User	3,000	10,000	-	3,000	3,000	3,000	3,000	3,000	3,000
Max.Logs	50,000	100,000	-	100,000	100,000	100,000	100,000	100,000	100,000
CPU	1.0GHz CPU	1.0GHz CPU	32Bit CPU	1.0GHz CPU	1.0GHz CPU	1.0GHz CPU	1.0GHz CPU	1.0GHz CPU	1.0GHz CPU
LCD	-	-	-	2.8" TFT	2.8" TFT	3.5" TFT	2.4" TFT	2.4" TFT	3.5" TFT
Sound	Voice	Buzzer	Buzzer	Voice	Voice	Voice	Buzzer	Voice	Voice
Multiple Language	-	-	-	Yes	Yes	Yes	Yes	Yes	Yes
Working Temperature	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)	-10°C~60°C (14°F~140°F)
Dimensions (W X H X D)	50X159X32mm (1.97X6.26X1.26")	50X159X25mm (1.97X6.26X1")	50X159X25mm (1.97X6.26X1")	130X140X30mm (1.97X6.26X1")	204X80X30mm (8.03X3.15X1.18")	185X130X35mm (7.28X5.12X1.38")	165X76X35mm (6.50X2.99X1.38")	80X180X40mm (3.15X7.09X1.57")	204X139X38mm (5.11X5.51X1.18")
Protection	IP65	IP65	-	-	-	-	-	-	-





IntelliSight


Cloud-based Smart Surveillance Management Platform


IntelliSight is a complete video management solution providing users with convenient, intelligent, real-time, and secure surveillance system services. The system consists of edge Al camera, NVR, Cloud Server, Desktop Management Station and Mobile APP. IntelliSight is the best choice for small and medium office buildings, retail shops, supermarkets, schools and other private and public area.



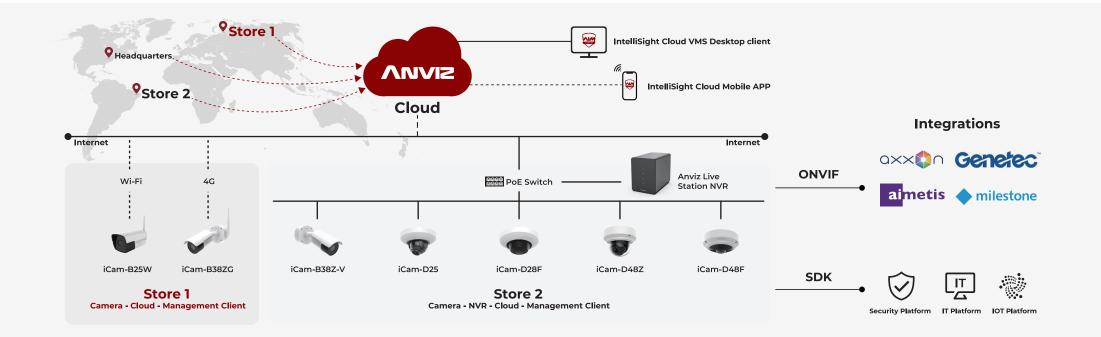

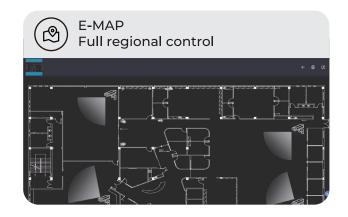


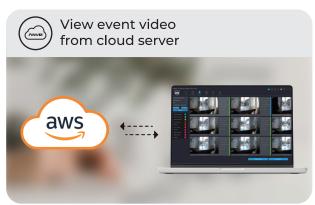


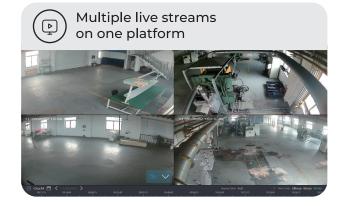




Features of IntelliSight VMS

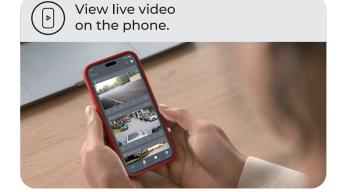

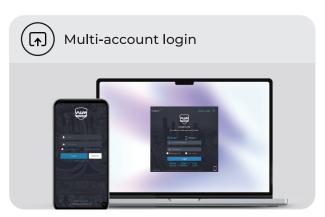

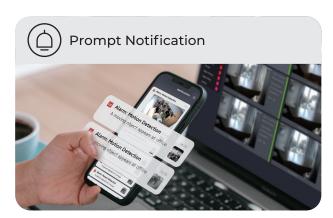

Core Technology of IntelliSight









Cyber Security



Zip Stream



High Dynamic Range




Network Solution



Scalable Cloud Infrastuctures



Advanced Ir Solution

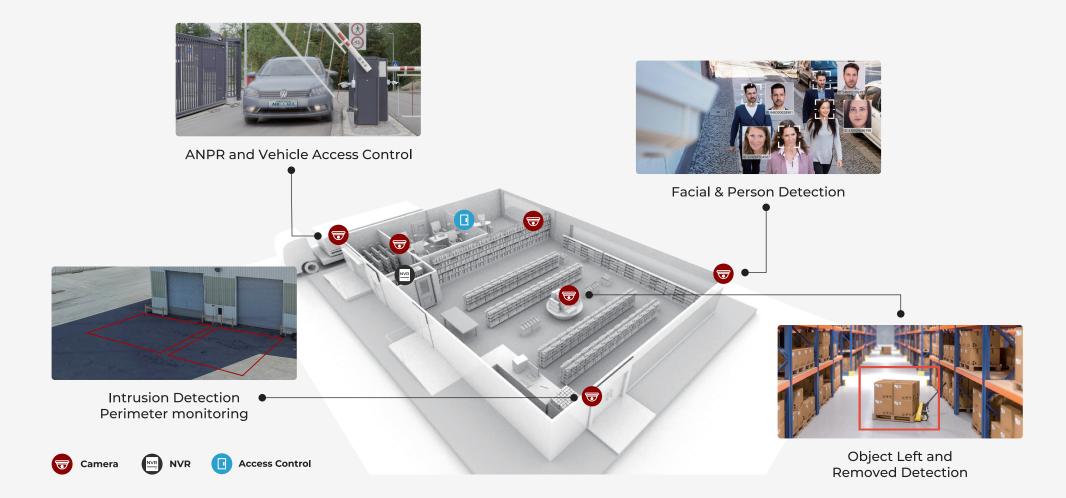

iCam Bullet Camera

Outdoor ANPR Bullet Network Camera

Specially designed for outdoor environments, the Bullet Camera features ultra-high definition resolution and stylish exterior design. The perfect combination of intelligent IR and day/night functions greatly improves visibility in dark and low-light environments.



PoE



Wi-Fi



RVI-V (LPR)



IP66



Advanced IR solution



Cloud



Edge Al



Person / Vehicle Detection



4G



RVI Behavior analysis





iCam Dome Camera

Al IR Weather-Proof Dome Network Camera

Dome network cameras series, both indoor use of the super mini camera, as well as AI infrared weatherproof outdoor camera, intelligent infrared and the perfect combination of day/night function greatly improve the effect of visibility in the dark and low-light environments.



PoE



RVI Behavior analysis



Advanced IR solution



Audio



Cloud



128G SD Card



Person / Vehicle Detection



Edge Al







iCam Fisheye Camera

8MP AI IR Fisheye Network Camera

The Fisheye Camera Series provides 360-degree panoramic images when installed on the ceiling and 180-degree panoramic views when installed on the sidewall. HDR and ultra-low light lenses ensure clear images in both bright and low-light environments.



PoE



360° Panoramic Viewing



Advanced IR solution



Audio



Edge Al



128G SD Card



Person / Vehicle Detection



Cloud





Live Station Series NVR

Network Video Recorder

Live Station is the latest NVR product series introduced by Anviz, featuring a stylish exterior design and a robust metal casing. It can be placed in IT rooms, on system administrator desks, and in other easily managed areas. Currently, there are two models of Livestation available, which support the installation of 2-4 3.5" HDD with a capacity of 8TB each, allowing for up to 2-4 months of high-quality 4K local video recording storage. It supports the connection of 32/64 IP cameras, with the convenience of one-click QR code device addition, flexible mobile app management, and real-time reception of alarm message push notifications.



Metal Casing and Stylish Design



H.264 / H.265



Cloud and Mobile Management



Max. 64 Channels






Al Based Video Cameras							
Model	iCam D25	iCam D48Z	iCam D28F	iCam D48F			
Series	Mini-Dome Network Camera	Dome Network Camera	Mini Fisheye Network Camera	Fisheye Network Camera			
Product Image				ARME			
Resolution	5M Pixels	8M Pixels	8M F	ixels			
Image Sensor	1/2.7" Progressive Scan CMOS	1/2.7" Progressive Scan CMOS	1/1.8" Progressi	ve Scan CMOS			
Lens	2.8mm	3.6mm-10mm 1.7mm		nm			
WDR		HDR 120db					
Horizontal Angle of View	105°	9942° 185°					
Frame Rate	Main Stream (2880*1620@30fps) Sub Stream (1920*1080@30fps) 3rd Stream (1280*720@30fps)	Main Stream (3840*2160@30fps) Sub Stream (1920*1080@30fps) 3rd Stream (1280*720@30fps)					
IR/Cut Distance	25M	40M 20M		М			
Audio	Built-in Microphone & speaker						
Compression	H.264 AVC, H.265 HEVC						
Internet Interface	RJ-45 (10/100Base-T)						
Supported Protocols	ONVIF Profile (G.M.S.T), TCP/IP, ICMP, HTTPS, FTP, RTP, RTSP, RTCP, SNMP, IGMP.						
Power	DC12V/PoE (802.3af)						
Protection	IP53	IP66	IP53	IP66			
Edge Storage	Support up to 128G micro SD card (suggest class 10)						
Basic Al function	Motion Detection, Person Detection, Face Detection Vehicle Detection, Pet Detection, Package Detection						
Advanced AI function	Intrusion, Line Crossing Detection, Region Entrance/Exiting Detection, Loitering Detection, (ALPR)Automatic License Plate Recognition, Face Recognition. Abnormal Sound Detection.						

	Al Based Video Cameras			
iCam B25W	iCam B38Z	iCam B38ZG		
WiFi Mini-Bullet Network Camera	Bullet Network Camera	4G/LTE Bullet Network Camera		
	G	5.6		
5M Pixels	8M F	Pixels		
1/2.7" Progressive Scan CMOS 1/1.8" Progressive Scan CMOS				
4mm	3.6mm-10mm			
	HDR 120db			
105°	9942°			
Main Stream (2880*1620@30fps) Sub Stream (1920*1080@30fps) 3rd Stream (1280*720@30fps)	Main Stream (3840*2160@30fps) Sub Stream (1920*1080@30fps) 3rd Stream (1280*720@30fps)			
20M	50M			
	Built-in Microphone			
	H.264 AVC, H.265 HEVC			
	RJ-45 (10/100Base-T)			
ONVIF Profile (G.M.S.T), TCP/IP, ICMP, HTTPS, FTP, RTP, RTSP, RTCP, SNMP, IGMP.				
DC12V/PoE (802.3af)				
	IP66			
Sup	port up to 128G micro SD card (suggest class	s 10)		
Motion Detection, Person Detection, Face Detection Vehicle Detection, Pet Detection, Package Detection				
	sing Detection, Region Entrance/Exiting Detection, I cense Plate Recognition, Face Recognition. Abnorm			

Smart Storage (NVR)					
Model Number	Live Station2	Live Station4			
Product Image	·				
Network Video Input	32 Channel	64 Channel			
Record Rate	Up to 200Mbps				
Compression	H.265 H.264				
Recording Resolution	4K/2K/1080P/720P				
Playback	4CH@4K/2K/1080P				
Style	2* SATA Port Support 8TB 3.5" HDD	4* SATA Port Support 8TB 3.5" HDD			
Maximum Storage	Up to 16TB	Up to 32TB			
Network Interface	RJ45 10/100/1000Mbps				
Working Temperature	-30°C to 40°C (22°F to 104°F)				
Power Supply	DC12V 5A				
Power Consumption	≤50W				





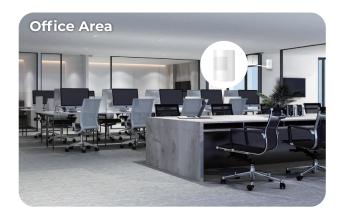


Support

16 Edge AI


Devices





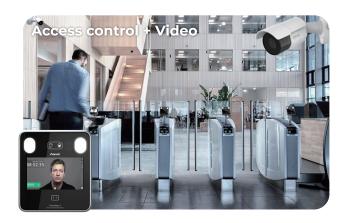




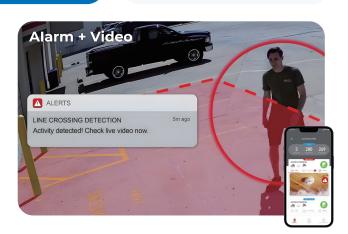

Anviz One

(Coming In 2024)

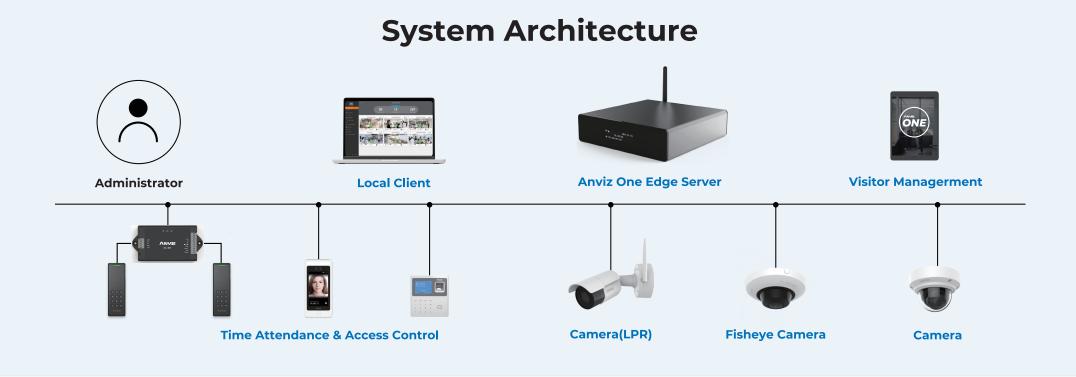





















Learn more about the partnership



Access Control

Time Attendance

Smart Surveillance

